

MISCELLANEOUS LIGHTS

OCEAN LED UNDERWATER LIGHTS



OceanLED X4 Series Underwater Lights

- Chemically Resistant Polymer with a built in driver.
- Compact and simple design. 60° top beam angle
- Operating voltage DC: 9-32 VDC 0.4A
- Approx. light penetration (average water quality): 20'
- Approx. light penetration (perfect water quality): 45'
- Extension cable length: 9.84'
- Hole size cutout for cable: 0.5"

Order No.	Mfg. No.	Model	Color	Fixture Lumens	List
356762	012301W	X4	White	1150	\$220.00
356771	012302B	X4	Blue	1150	\$220.00



OceanLED X-Series X8 Underwater Lights

- Fantastic for fishing or having fun with family and friends.
- 60° circular beam angle allows for a variety of mounting orientations maintaining light spread.
- 60° top beam angle / 60° side beam angle.
- Circular beam.
- Fish-strobe mode.
- Lumens: 2900
- Min./Max. operating voltage: 9-32 VDC 0.75A
- Approx. light penetration (average water quality): 26'
- Approx. light penetration (perfect water quality): 72'

Order No.	Mfg. No.	Model	Color	Fixture Lumens	List
356789	012305B	X8	Blue	2300	\$440.00



OceanLED 2010 TH HD Gen 2 Midnight Blue Underwater Light

60° Top Beam Angle / 20° Side Beam Angle. Elliptical beam angle provides excellent water penetration.

Small thru hull cut out size. Only 1" hole provides plenty of mounting options.

Trusted by the world's leading boat builders and professional anglers to catch fish and help bring-Made of Aluminium Bronze AB2

Factory sealed unit.

Up to 7000 fixture lumens

12/24 FDC

11400 Lumens

Current draw: 12 VDC 5.3A / 24 VDC 2.7A

Order No.	Mfg. No.	List
356807	001-500731	\$1,899.00



OceanLED Sport S3124s Underwater Lights


- Dual color: Midnight Blue / Ultra White; exceptionally bright and randomised strobing of the light is proven to attract more fish and catch more bait.
- 90° top beam/20° side beam: lights up a large area of water.
- Simple to install with a 12mm hole to feed the cable through and 3 screws in place. No bonding required.
- Fish-strobe mode.
- Up to 3000 fixture lumens. Rectangular beam; true 90° beam angle with no fading edge gives better illumination.

Lumens: 55600

Fixture lumens: 3000

Min.-Max. operating voltage: 9-32 VDC 1.7A

Order No.	Mfg. No.	Color	List
356798	012103WBW	Blue/White	\$450.00



OceanLED Sport S3166s Underwater Lights

- Full RGBW Multi-Color Lighting
- 90° top beam/20° side beam: lights up a large area of water.
- Simple to install with a 12mm hole to feed the cable through and 3 screws in place. No bonding required.
- Fish-strobe mode.
- Up to 3500 fixture lumens. Rectangular beam; true 90° beam angle with no fading edge gives better illumination.

Lumens: 8448

Fixture lumens: 3500

Min.-Max. operating voltage: 9 - 32 VDC

Current / Amp draw (DC) 12 VDC 5.5 A / 24 VDC 2.4 A

Order No.	Mfg. No.	Color	List
357164	0121110C	RGBW	\$699.00



Over 350 brand name manufacturers

Enormous, 50,000 sq. ft. warehouse located next to Ft. Lauderdale International

Airport to support all of our customers.

Special orders are no problem.

Selection second to none.

120 years combined marine experience within our sales team - we can find what you need!

Exclusive Wesmar distributor.

Hours: 7:30 a.m. - 4:30 p.m. - Monday - Friday.

Our knowledgeable & friendly staff is ready to help you.

Call Debbie Senti at 954-463-4307 ext. 313

Call Jim Haun at 954-463-4307 ext. 304

Call Lou Moran at 954-463-4307 ext. 314

Call John Carracino 954-732-9570 (Cell)

Email: johnc@dshullco.com

Call Pamela Hutchisson at 954-463-4307 ext. 322

Call Bob Leatherman at 954-463-4307 ext. 305 (Wesmar)

MISCELLANEOUS LIGHTS

LUMITEC LED LIGHTS



Lumitec Capri LT - LED Flood Light

1000 lumens
1.3A @ 12 VDC; 600 mA @ 24 VDC
Rated Watts: 16
CCT* 5000
CRI 70+
Op. Temp F/C: -31/35 to +131/55

Voltage: 10-30 vDC
Mounting hole diameter: 3.8" x 1.25"
Width: 1.75"
Depth: 1.57"
Color: white
Non-dimming; Compatible with third party dimmer

Order No.	Mfg. No.	Mount	List
328701	101288	Flush	\$109.00
328712	101292	Bracket	\$109.00



Lumitec Capri 2 LED Flood Light

Two color technology provides amazing dimming white and dimming blue light selections. Wide beam optical technology puts the light where you need it most, providing up to twice the usable light of competitors. Fully sealed. Designed and manufactured in the USA.

Voltage: 10-30 vDC
1000 lumens
1.3A @ 12 VDC; 600 mA @ 24 VDC
Rated Watts: 16
CCT* 5000
Op. Temp F/C: -31/35 to +131/55

Mounting hole diameter: 3.8" x 1.25"
Height: 4.94"
Width: 1.75"
Depth: 1.57"
White dimming and blue dimming

Order No.	Mfg. No.	Mount	List
328723	101099	Flush	\$189.00



Lumitec Carera 2 LED Flood Light

Two color technology provides amazing dimming white and dimming blue light selections. Wide beam optical technology puts the light where you need it most, providing up to twice the usable light of competitors. Fully sealed. Designed and manufactured in the USA.

Voltage: 10-30 vDC
1000 lumens
1.3A @ 12 VDC; 600 mA @ 24 VDC
Rated Watts: 16
CCT* 5000
Op. Temp F/C: -31/35 to +131/55

Mounting hole diameter: 3.8" x 1.25"
Height: 4.94"
Width: 1.75"
Depth: 1.57"
White dimming and blue dimming

Order No.	Mfg. No.	Mount	List
328734	101102	Bracket	\$189.00



Lumitec Orbit Flush Mount LED Down Light

Two color technology provides amazing white output with elegant blue and night-vision-preserving red. Wide beam optical technology puts the light where you need it most providing up to twice the usable light of competitors. Fully sealed. Designed and manufactured in the USA.

Voltage: 10-30 VDC
160 lumens
Mounting hole diameter: 1-1/4"
360 mA @ 12 VDC; 180 mA @ 24 VDC
Rated Watts: 4
CCT* 5000
Depth: 0.75"
Diameter: 2"
Op. Temp F/C: -31/35 to +131/55
Non-dimming; Compatible with third party dimmer

Order No.	Mfg. No.	Mount	List
328745	112528	Flush	\$99.00



Lumitec Mirage Flush Mount LED Down Lights

Best-performing down lights in the category. Incredible output and a profile that is among the slimmest in the industry. Beat comparable 20W halogens by up to 300% in recent studies. Completely sealed and IP67 rated. Suited for indoor or outdoor overhead lighting needs.

Voltage: 10-30 vDC
172 lumens
360 mA @ 12 VDC; 180 mA @ 24 VDC
Rated Watts: 3
CCT* 5000
Op. Temp F/C: -31/35 to +131/55

Timed toggled protocol: Yes
Mounting hole diameter: 2"
Diameter: 3.25"
Depth: 1.0"
Non-dimming; Compatible with third party dimmer

Order No.	Mfg. No.	Mount	Housing Color	Light Color	List
328756	113128	Round Flush	White	White Dimming; Red non-dimming; blue non-dimming	\$99.00
328767	113198	Square Flush	Glass	White dimming; red non-dimming; blue non-dimming	\$99.00
328778	113118	Round Flush	Polished	White dimming; red non-dimming; blue non-dimming	\$99.00
328789	113119	Round Flush	Stainless Steel	Warm white dimming	\$99.00



Lumitec Nevis LED Utility Lights

Bright, reliable and easy to install. Delivers 1000 lumens. IP67 compliant. Compatible with most PWM LED dimmers.

Voltage: 10-30 vDC
1000 lumens
1.3A @ 12 VDC; 600 mA @ 24 VDC
Rated Watts: 16
CCT* 5000
Op. Temp F/C: -31/35 to +131/55

Mounting hole diameter: 5/32"
Height: 2.5"
Width: 5"
Depth: 0.63"
Non-dimming; Compatible with third party dimmer

Order No.	Mfg. No.	Model	Housing Color	Light Color	List
328802	101148	Nevis2	Brushed	White Dimming; Red dimming	\$189.00
328813	101296	NevisLT	Brushed	White non-dimming	\$139.00




954-463-4307 • D.S. Hull Company, Inc. • www.dshullco.com

MISCELLANEOUS LIGHTS

LUMITEC LED LIGHTS & LUMITEC UNDERWATER LIGHTS

Like Us On
facebook

954-463-4307 • D.S. Hull Company, Inc. • www.dshullco.com

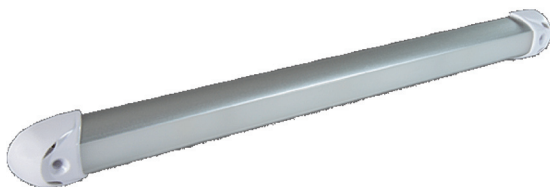

Lumitec Rail2 LED Utility Light

Completely water sealed and IP67 compliant. Equally effective for use in exterior as well as interior applications

Voltage: 10-30 vDC

900 lumens

1.3A @ 12 VDC; 600 mA @ 24 VDC

Rated Watts: 16

CCT" 5000

Op. Temp F/C: -31/35 to +131/55

Mounting hole diameter: 5/32"

Height: 1.1"

Width: 11.72"

Depth: 0.60"

Order No.	Mfg. No.	Mount	Housing Color	Light Color	List
328824	101243	Surface	Brushed	White Dimming; non-dimming red; non-dimming blue	\$109.00



Lumitec Andros - Courtesy/Accent LED Light

Compact, attractive and remarkably bright. Fully water sealed and IP67 compliant, perfect for interior or exterior installation.

Voltage: 10-30 vDC

45 lumens

45mA @ 12 VDC

Rated Watts: 0.55

CCT" 5000

Op. Temp F/C: -31/35 to +131/55

Mounting hole diameter: 5/16"

Height: 1"

Width: 1"

Depth: 0.50"

Non-dimming; Compatible with third party dimmer

Order No.	Mfg. No.	Mount	Housing Color	Light Color	List
328835	101043	Surface	Polished S/S	White	\$19.95



Lumitec Newt - Courtesy/Accent LED Light

Originally designed for livewells but its small size, amazing output and ease of installation make it perfect for use under cabinets, in storage lockers, lighting toe kicks and even as an overhead light. Durable polycarbonate and completely water sealed and IP67 compliant.

Voltage: 10-30 vDC

45 lumens

45mA @ 12 VDC

Rated Watts: 0.55

CCT" 5000

Op. Temp F/C: -31/35 to +131/55

Non-dimming; Compatible with third part ydimmer

Mounting hole diameter: 5/8"

Height: N/A

Width: N/A

Depth: 0.78"

Diameter: 0.88"

Order No.	Mfg. No.	Mount	Housing Color	Light Color	List
328846	101084	Surface	White	White	\$14.95
328857	101085	Surface	White	Blue	\$14.95



Lumitec Mantis Dock Lighting Kit

Leverages the cutting edge Quattro Spectrum underwater light but adds an innovative Zip-Mount universal mounting system and a completely new full-immersion rear seal and wire technology. Lights mount easily to square or round pilings up to 14" diameter/12" square, even on pilings with the typical "fenders" above the waterline. System is UL listed. Powered by IP68 rated power supply in a durable weatherproof enclosure and is easily plugged into any standard outlet for quick and easy DIY installation. All wiring, connectors, mounts and hardware included. 3-year warranty.

Voltage: 10-30 vDC

2000 lumens

2.1A @ 12 VDC; 1.1A @24 VDC

Rated Watts: 25

CCT" 6500

Op. Temp F/C: -31/35 to +131/55

Mounting hole diameter: .5"


Height: N/A

Width: N/A

Depth: 0.71"

Diameter: 3.85"

Order No.	Mfg. No.	Mount	Housing Color	Light Color	List
328903	101525	Surface	Bronze	White/Blue	\$1499.00



Lumitec SeaBlazeX2 LED Underwater Light

Undisputed value leader in underwater lighting.

Voltage: 10-30 vDC

6000 lumens

5 A @ 12 VDC; 2.5A @24 VDC

Rated Watts: 60

CCT" 6500

Op. Temp F/C: -31/35 to +131/55

Third Party Dimmer Compatibility: No

Timed Toggled Protocol: Yes

Mounting hole diameter: 1/2"

Height: N/A

Width: N/A

Depth: 0.85"

Diameter: 3.94"

Order No.	Mfg. No.	Mount	Housing Color	Light Color	List
328868	101515	Surface	Bronze	RGBW	\$599.00
328879	101516	Surface	Bronze	White/Blue	\$399.00



Lumitec SeaBlaze Quattro LED Underwater Light

Undisputed value leader in underwater lighting. Bronze housing.

Voltage: 10-30 vDC

2000 lumens

2.1A @ 12 VDC; 1.1A @24 VDC

Rated Watts: 25

CCT" 6500

Op. Temp F/C: -31/35 to +131/55

Mounting hole diameter: .5"

Height: N/A

Width: N/A

Depth: 0.71"

Diameter: 3.85"

Order No.	Mfg. No.	Mount	Housing Color	Light Color	List
328881	101511	Surface	Bronze	White/Blue	\$289.00
328892	101510	Surface	Bronze	RGBW	\$349.00